



Self-powered button product manual

<http://www.livolo.com>

Product instructions:

- 1. Self-powered button products need to be pasted on a clean and smooth wall, rough walls may cause the product to fall off.
- 2. Do not install on the metal door, the metal door will affect the signal.


Basic function

Self-powered button products are used to pass control signals to the Livolo gateway,so as to control the device under the gateway pairing (such as switch, etc.). First the self-powered button products to pair with Livolo gateway, then the mobile phone APP connected through the gateway sets the automation program. You can control the corresponding device by clicking the button of the self-generating button product.

Specifications

No.	Technical Parameters	Requirements
1	Size	Φ 66mm*23mm
2	Communication protocol	ZIGBEE/EC
3	Pressing angle	any
4	Longevity	100,000 times
5	Distance	35m

Product Size

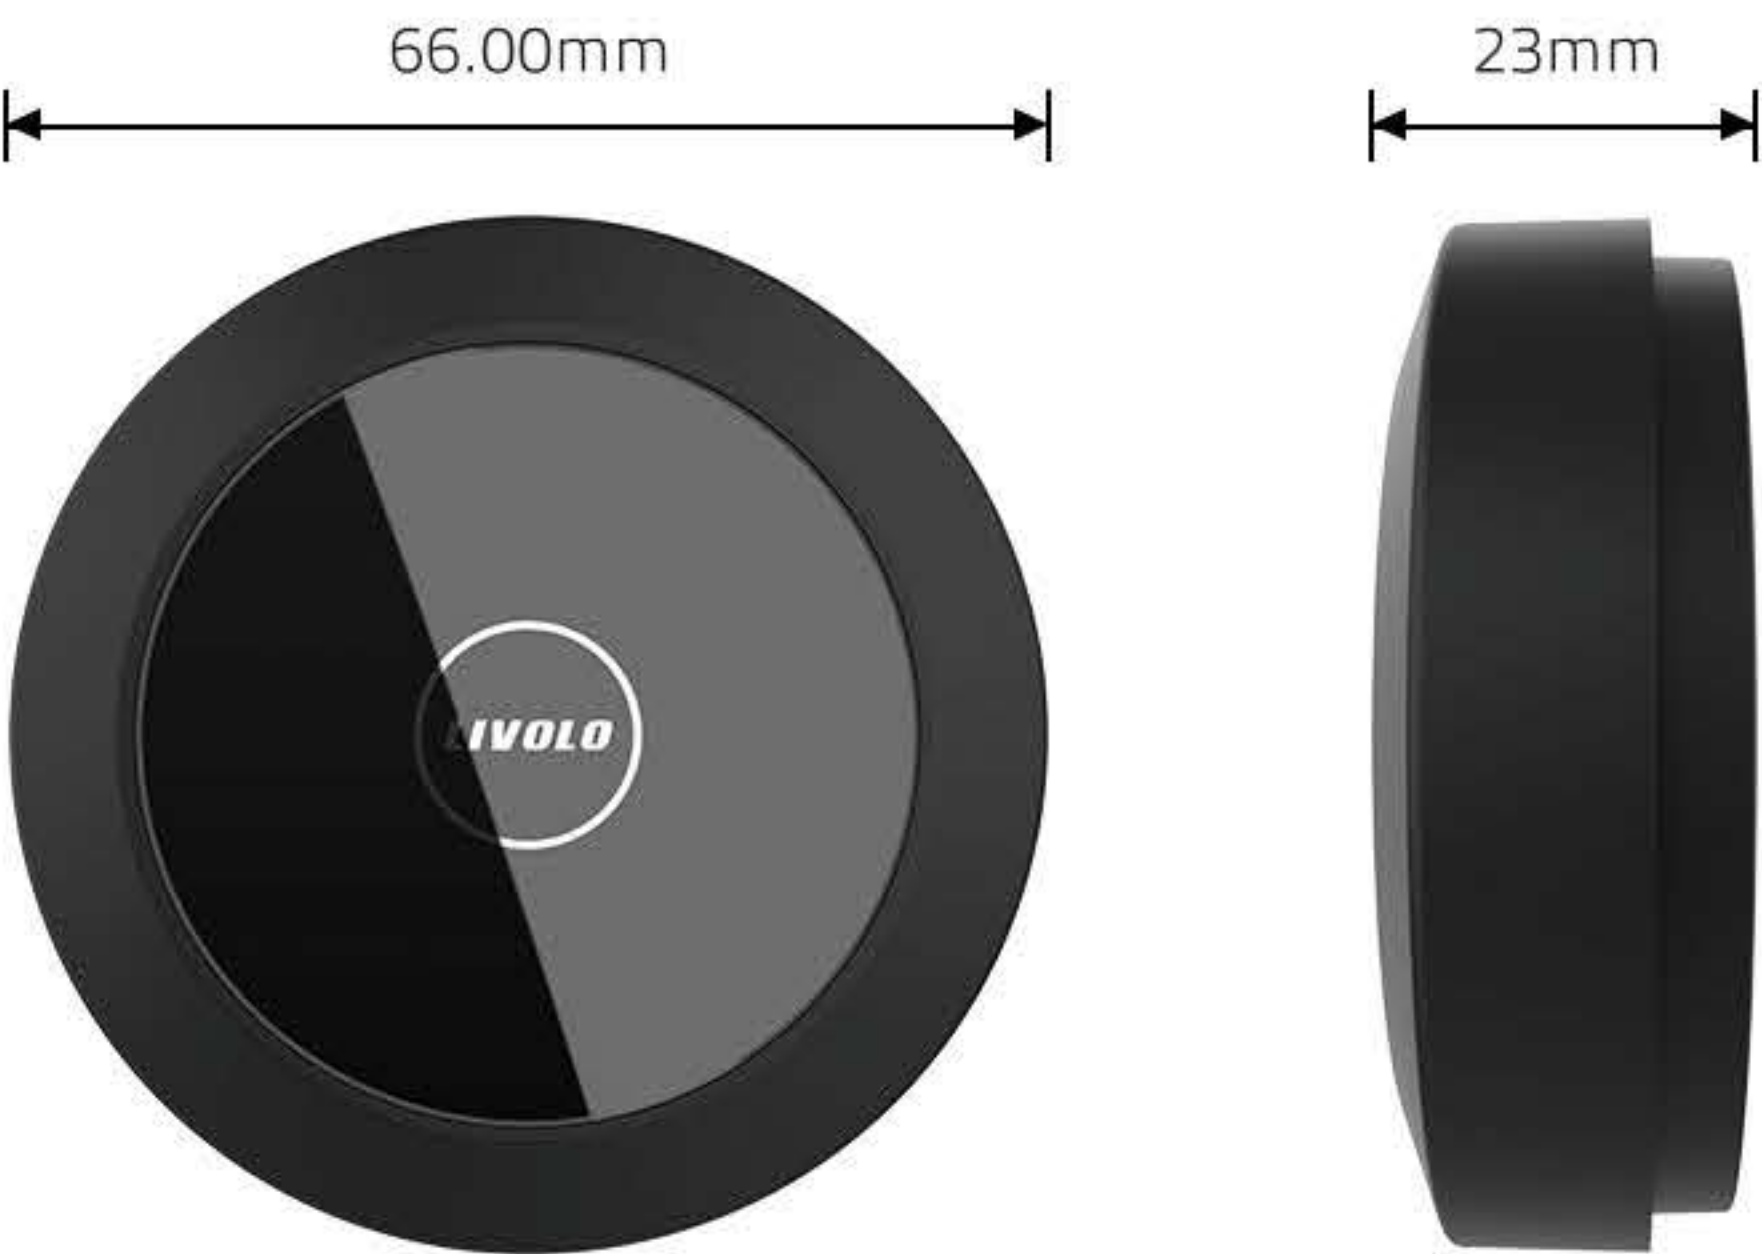

ZigBee/EC Switch and gateway synchronization

Scan the QR code to download the LIVOLO APP



ANDROID APP
DOWNLOAD



IOS APP
DOWNLOAD


ZigBee/EC synchronizing instructions

Step 1:

Please complete the gateway distribution network work before zigbee/EC switch configuration, the details of the gateway distribution method, please refer to the gateway manual.

Step 2:

Open the livolo APP and click the "Device" icon, Click on the "+" button in the upper right corner. Select the corresponding equipment.

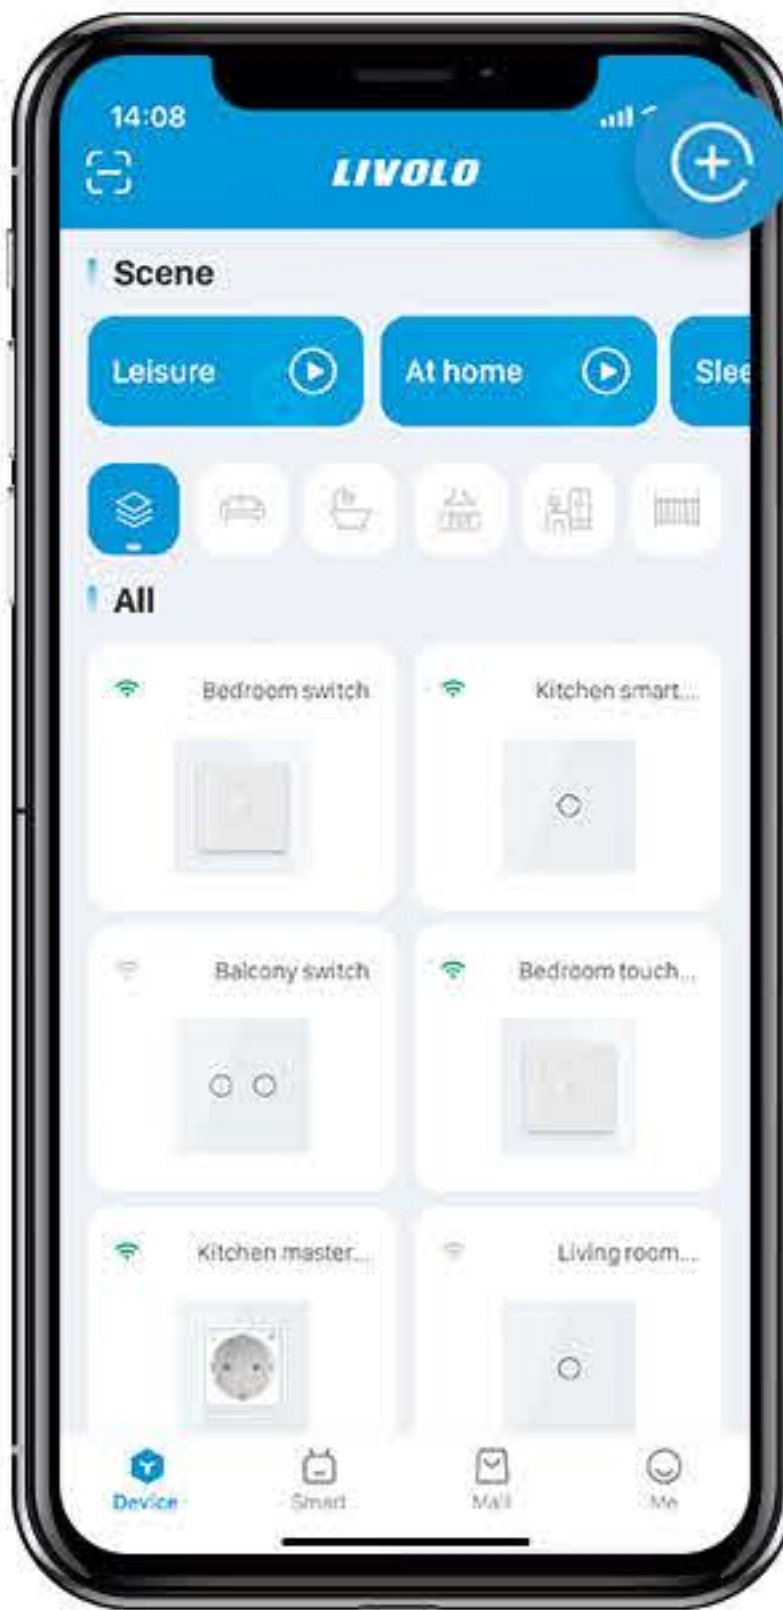

Step 3:

Click on the "Next" button in the APP, keeping press the self-generating button product button continuously within 1 minute according to the app guide,When the pairing progress bar reaches 100%, click "Finished" after completing the naming process to successfully paired.

