

LIVOLO
LIVE ON LOVE


ZigBee Curtain Switch Function Model Instruction

<http://www.livolo.com>

Installation Considerations

1. Never install with power on.
2. Wiring must be performed in accordance with wiring requirements.
3. Each load connected to the switch must not exceed 3A.
4. The mounting box hole distance is 60mm, the diameter is at least 72mm, and the depth is 65mm.

Installation Diagram:



1
Open the package then take out product.



2
Connect wire and tighten the screws.



3
Use the two screws to fix.



4
Cover the panel, connect the power.

Basic Functions

Touch the left button to rotate the curtain motor forward, and touch the right button to rotate the curtain motor in reverse. When the touch backlight is red, the curtain motor works. After touching the red button again, the curtain motor stops working. When the other button is touched during forward rotation, the curtain motor stops forward rotation and starts to reverse, and vice versa.

Function model




Glass panel



Touch button exchange functions

If you need to exchange the left and right button function due to the wrong connection of the curtain motor's forward and reverse rotation or due to your habits, you can touch the two buttons at the same time and hold it for 5S. When you hear the buzzer beep, the key exchange succeeded.

The Wiring Diagram of Curtain Switch

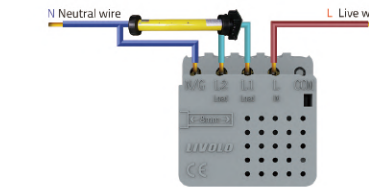

Product Specifications

No.	Technical index	Requirements
1	Size	80mmx80mmx45mm
2	Voltage	Live and neutral power supply 100Vac~240Vac 50/60Hz
3	Status indicator	Two-color LED lights + buzzer
4	Load	3A
5	Environment temperature and humidity during use	-10°C - +40°C
6	Switch life	100,000 times

No.	Technical index	Requirements
7	Protocol	Zigbee ZHA
8	Flame retardant shell	✓
9	Shell surface	Glossy

ZigBee Switch and gateway synchronization

Scan the QR code to download the LIVOLO APP



ANDROID APP
DOWNLOAD



IOS APP
DOWNLOAD


Description of the curtain switch distribution network

Step 1:

please complete the gateway pairing before the curtain switch. For the gateway pairing steps please refer to the gateway manual.



Step 2:

Open the Livolo APP on the "Device" page, click the "+" button in the upper right corner, and select the "Curtain" device.

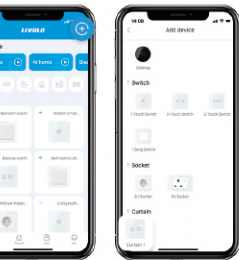

Step 3:

According to the app guide, touch and hold any button of the curtain switch for 5S, When you hear a beep, click "Next" on the APP. After the matching progress reaches 100%, click "Finished" after completing the naming. After the curtain switch is successfully paired, it will enter the automatic stroke calibration mode. The curtain motor will perform a round-trip stroke operation and confirm the stroke length of the curtain opening and closing.

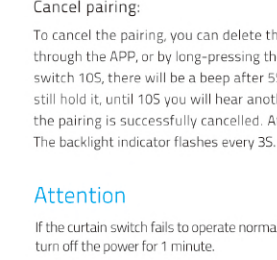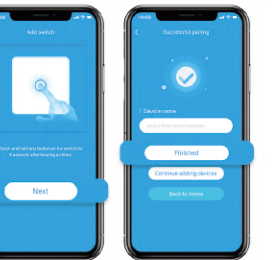

Cancel pairing:

To cancel the pairing, you can delete the device through the APP, or by long-pressing the curtain switch 10S, there will be a beep after 5S, please still hold it, until 10S you will hear another beep, the pairing is successfully cancelled. After that, The backlight indicator flashes every 3S.

Attention

If the curtain switch fails to operate normally, please turn off the power for 1 minute.

Range of Application:

