



Wire-free Switch Manual

<http://www.livolo.com>

Installation Precautions:

This product can be attached to any location required, but before sticking it, please make sure that the wireless control signal is good in that location, you can first carry out a control test in the required location, and then proceed with the sticking. It is recommended to avoid sticking it on metal media to prevent interference with the wireless signal.

Installation Instructions:



1
Take out the product and pry off the back plate.



2
Unscrew 3 screws and remove the circuit board.



3
After installing the battery, tighten the screws and restore the product.



4
Tear off the adhesive tape and stick it to the desired location.


Product Instructions:

Before using the “smart Wire-free Switch”, you need to put in the CR2032 button battery to make it work properly.

Please note that after installing the battery and covering the glass panel, due to the sudden change of the touch medium, the switch will enter touch auto-calibration mode, which takes about 15 seconds. After 15 seconds, the touch function will return to normal. At this point, touch the button and the corresponding indicator light will flash.

Basic Functions:

Smart wire-free switch can wirelessly control the on and off of devices such as touch switches. There are two ways to use this switch, one is to control the switch device through the gateway, setting automation in the gateway, and the other is to directly pair the switch and control the device remotely.

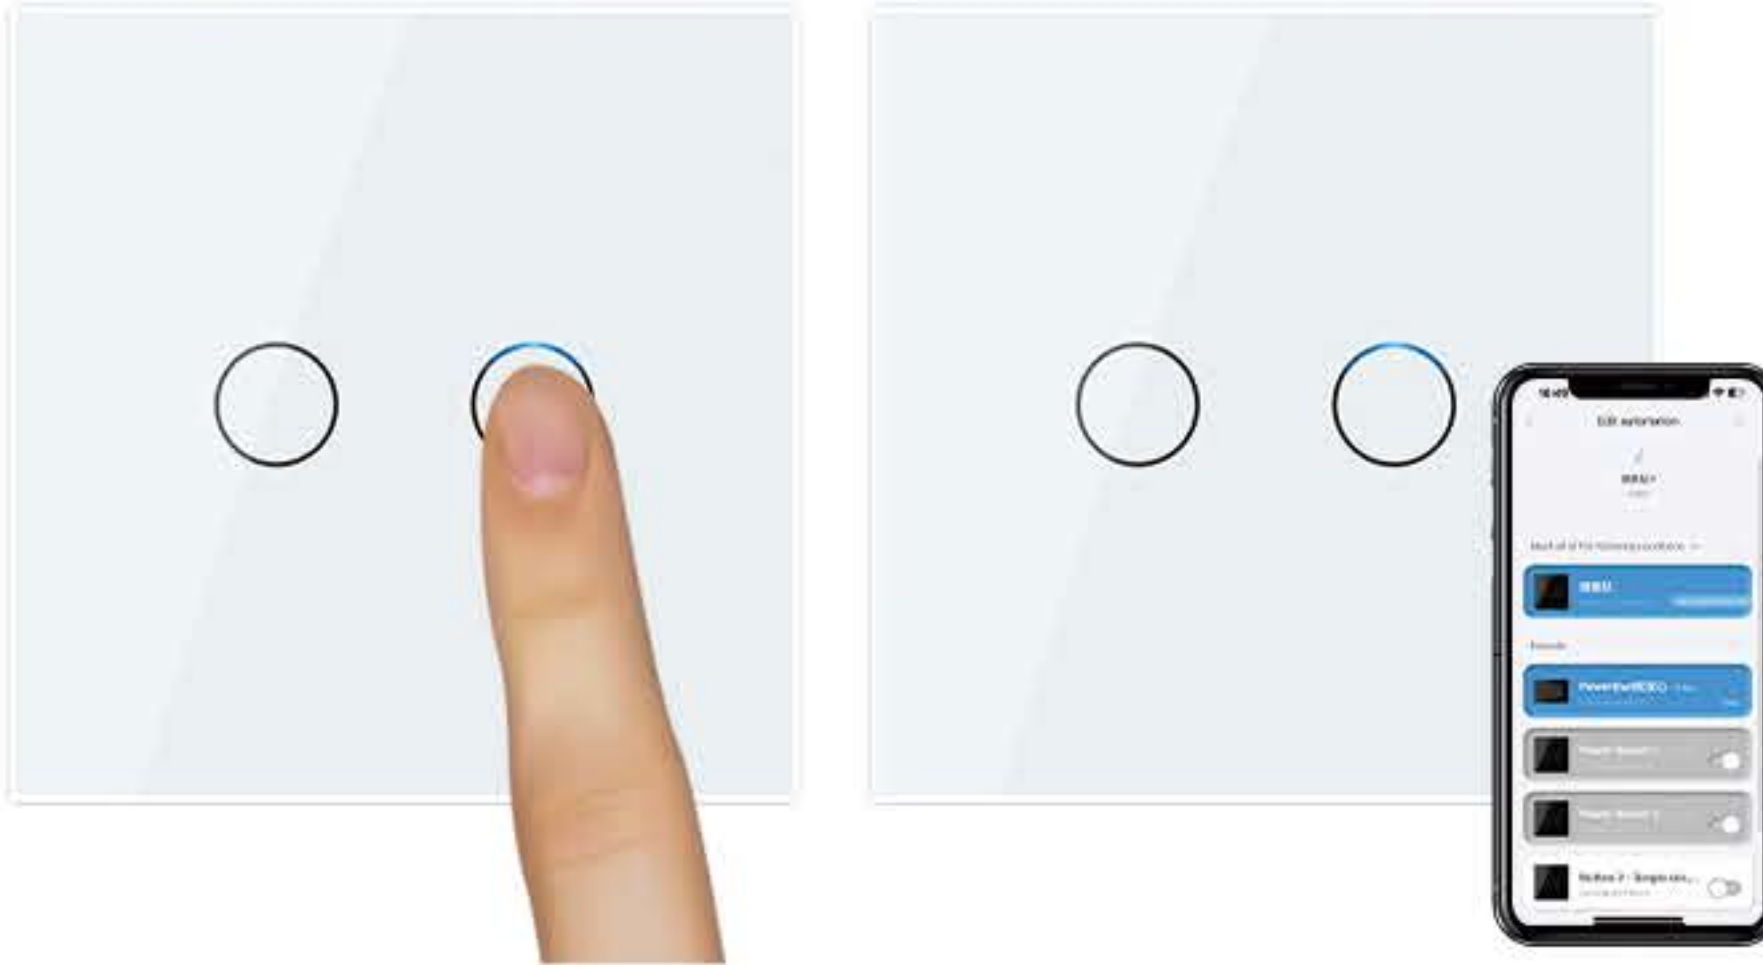

Product specifications

No.	Technical index	Requirements
1	Size	80mm*80mm*9.4mm
2	Voltage	Button battery CR2032, 3V
3	Status indication	Blue LED indicator light
4	Operation environment	-10℃ - +40℃ RH<90%
5	Retardant shell	YES
6	Battery Life	1gang: 2.7years 2gang: 1.6years Actual battery life may increase or decrease depending on the frequency of use.

Download the LIVOLO APP

Scan the QR code



ANDROID APP
DOWNLOAD



IOS APP
DOWNLOAD


Control Instructions:

1. The method of controlling the switch through the gateway

Before using this method, the gateway must be configured.

Network Synchronization:

- 1) Open LIVOLO HOME app.
- 2) Pairing smart wire-free switch: Click "Device", and then "+" in the upper right corner, "Remotes" -> "**" wire-free switch" -> select the gateway, and then follow the interface prompts to complete the pairing operation.

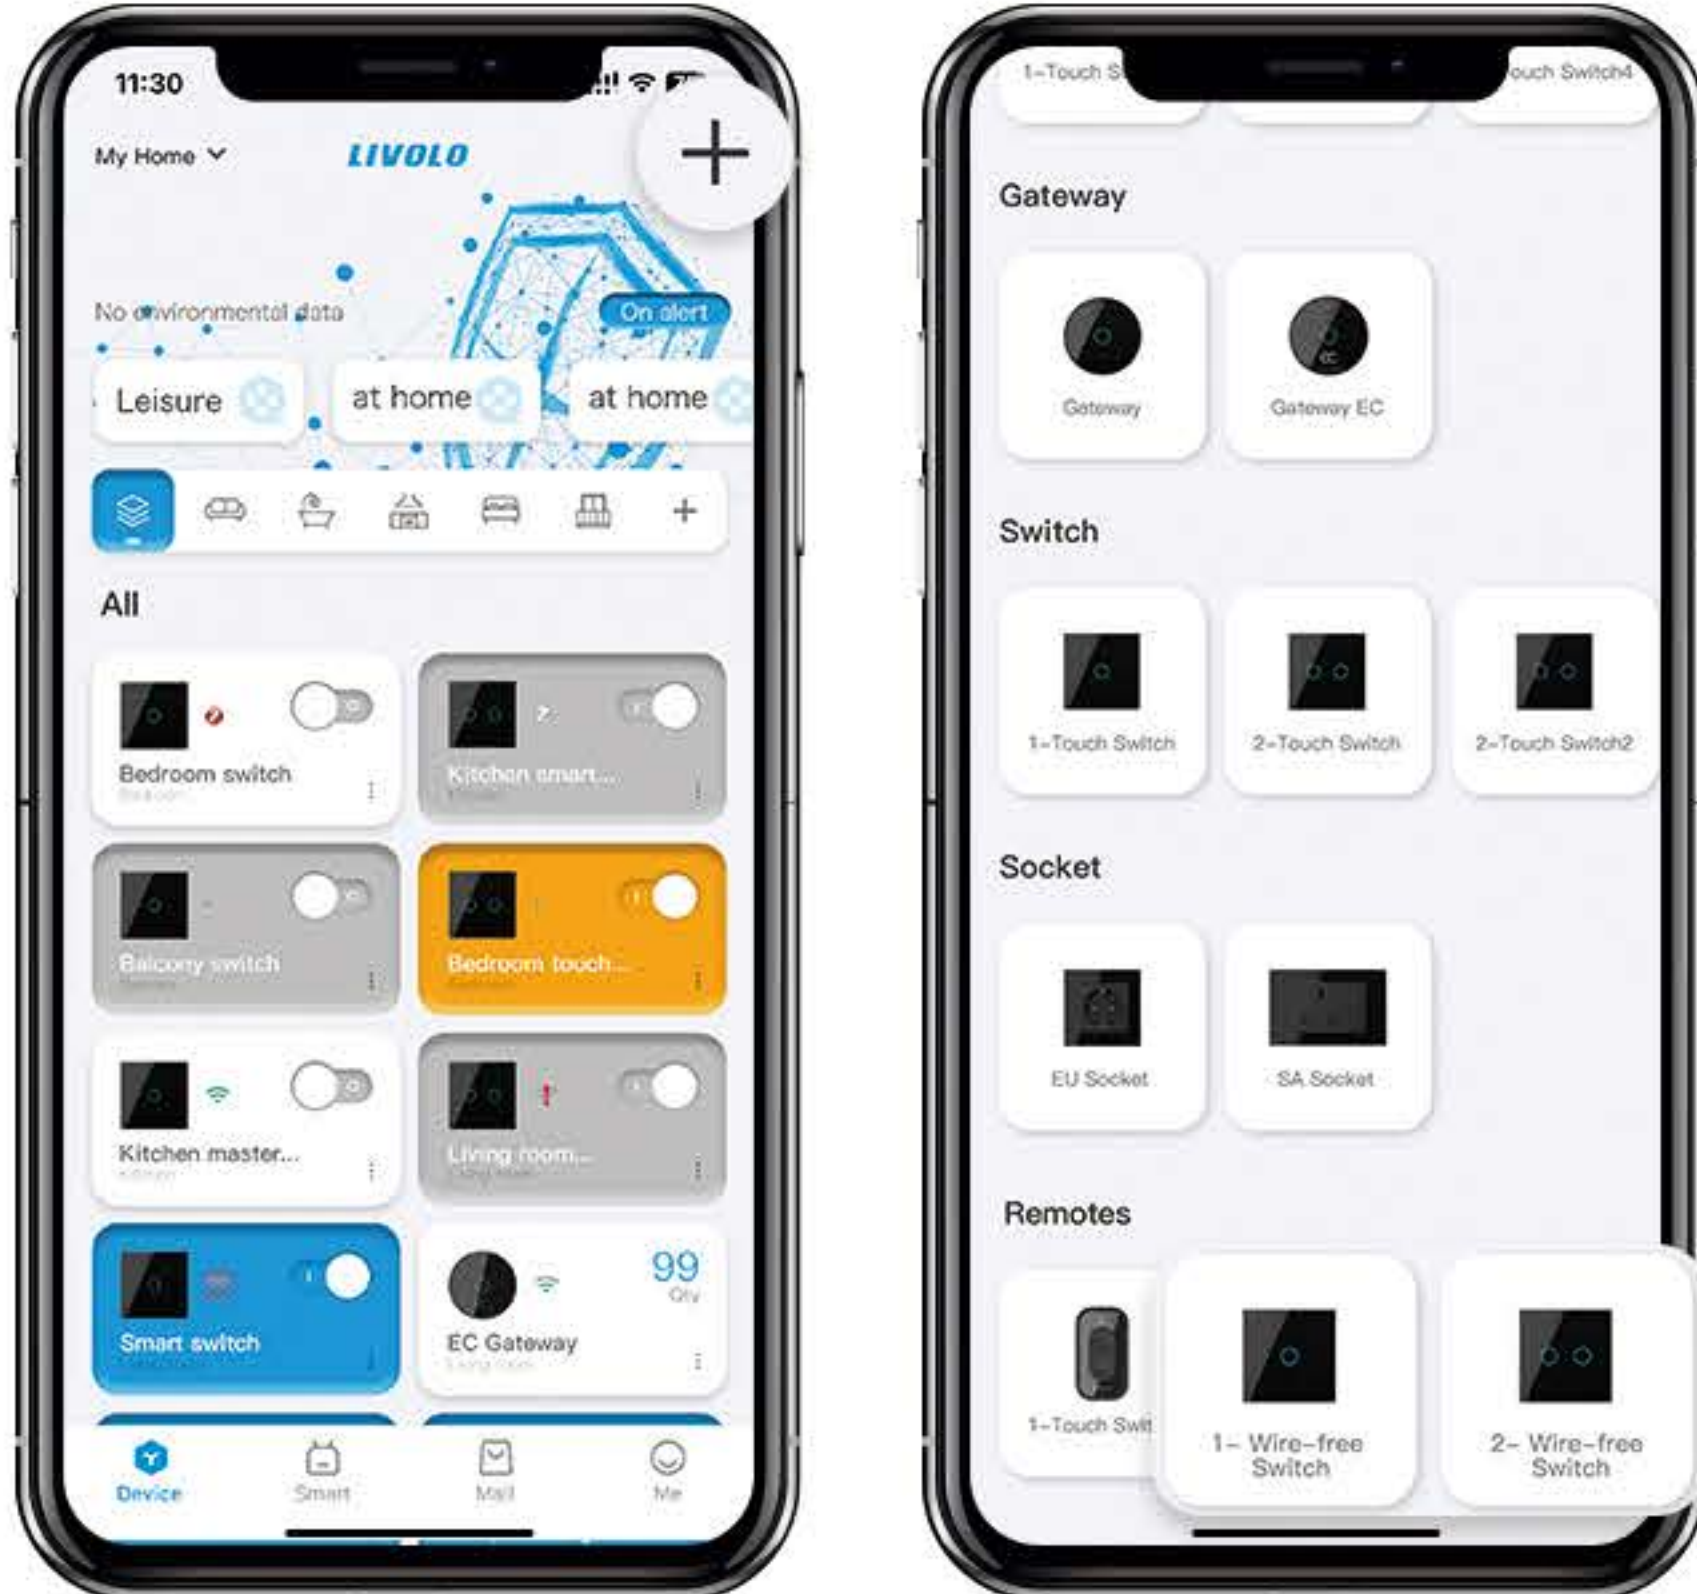

3) Set up automation rules:

Click "Automation" in the the upper right corner of "smart" page, and then follow interface prompts to set the required automation rules.

Delete Device

In the APP, click the "**" wire-free switch" -> "... " in the upper right corner -> Delete.

2. The method of directly controlling the switch

Pairing

- 1) Press and hold any button on the switch for 5 seconds, release it after the beep.
- 2) Press the pairing button of the smart wire-free switch, and the switch will beep once, indicating that the pairing is successful.

Delete Device

1) Press and hold the switch for 10 seconds to unpair all button remote controllers bound to the touch switch;

2) Long press the switch for 5 seconds, press the corresponding binding button of the smart wire-free switch, the switch will beep twice, indicating that the smart wire-free switch is successfully unpaired.

Precaution Notes:

During the battery replacement process and the product installation process, it may trigger the touch auto-calibration mode, which is normal. It will return to normal after 15 seconds.

If the EC wire-free switch doesn't work, please try the following 3 methods for improvement:

Method 1: Remove the glass panel and reinstall it, ensuring that it is properly assembled, and wait for at least 15 seconds before retrying.

Method 2: Please take out the button battery and put it back after 1 minute of power off.

Method 3: Check the battery level and replace the battery with a fully charged one.

Product Size:

